






**BOLTECH** PIONEER OF TECHNOLOGY


## Electro-Hydraulic scissor lift HSL 301S

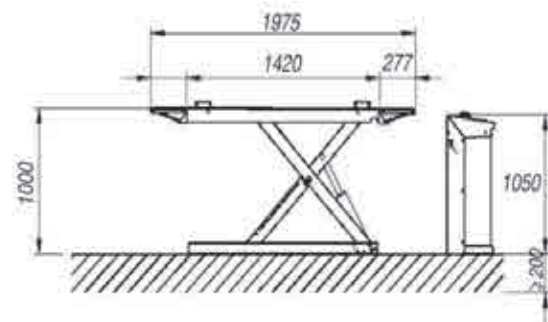



**On Floor Installation**

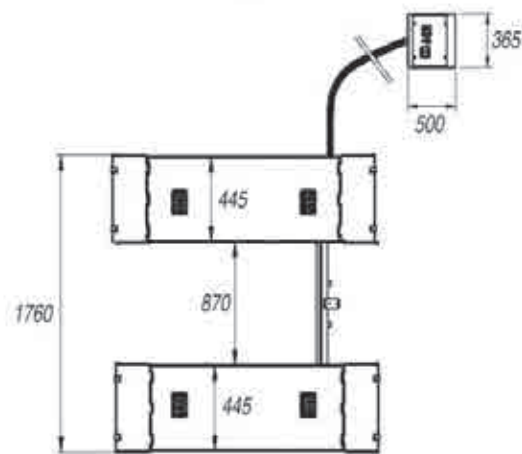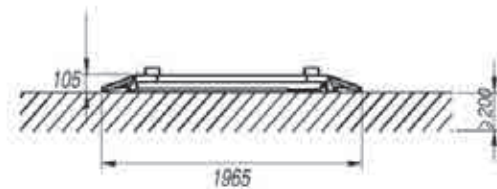

**Fig 4**

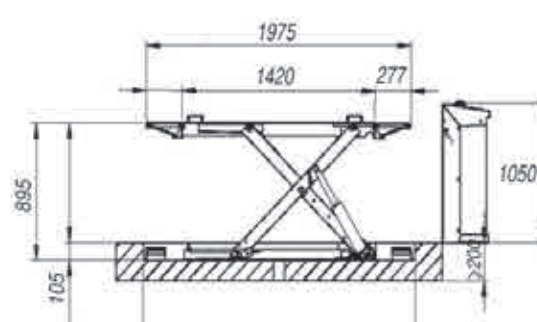

**In Ground Installation**

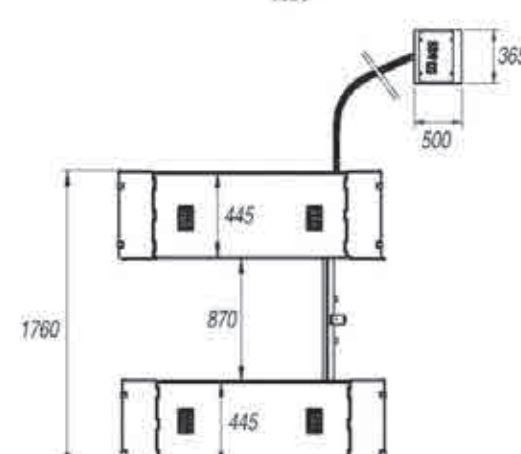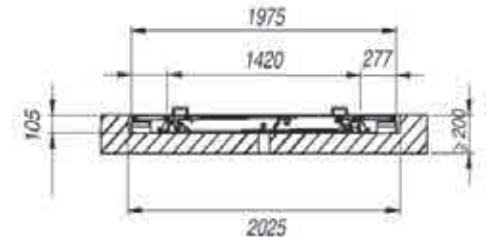

**Fig 3**

*Technical Data*

**Single phase and 3-phase can  
be selected by customer**

Max capacity	KG	3000
Raise lift time	S	22
Min height	MM	105
Max height	MM	1000
Entry dimensions with related items	MM	1975x455
Lift length on ground	MM	1975
Lift width	MM	1760
Electric motor	Volt / Amper	220V - 50HZ By Order 400V - 50HZ
Motor power	KW	2.2 / 3
Max hydraulic pressure	Bar	290
pneumatic power supply	Bar	6-8
Current voltage in control unit	Volt	24
The total weight of lift packaged	KG	470

39100 Bolzano Maso Della Pieve Str.nr. 4/f ITALY  
Tel : +39 - 471263755 Direct : +39 - 282873136 Fax : +39 - 471267009

**Sales@boltech.it**

**CE**  **SELECT YOUR COLOR**


## Specification

- Single phase 230 V / 50 Hz and 3 phase 230 / 400 V - 50 Hz available
- Electro-hydraulic functioning
- Electro-mechanical safety
- locking devices
- Electrically operated foot guard
- In three versions : On floor in , In ground and portable
- Safety metallic surface ( optional )
- Minimum height : 105 mm
- Maximum height : 1000 mm
- Suitable for tire shops



PORTABLE VERSION

Safety metallic surface ( optional )

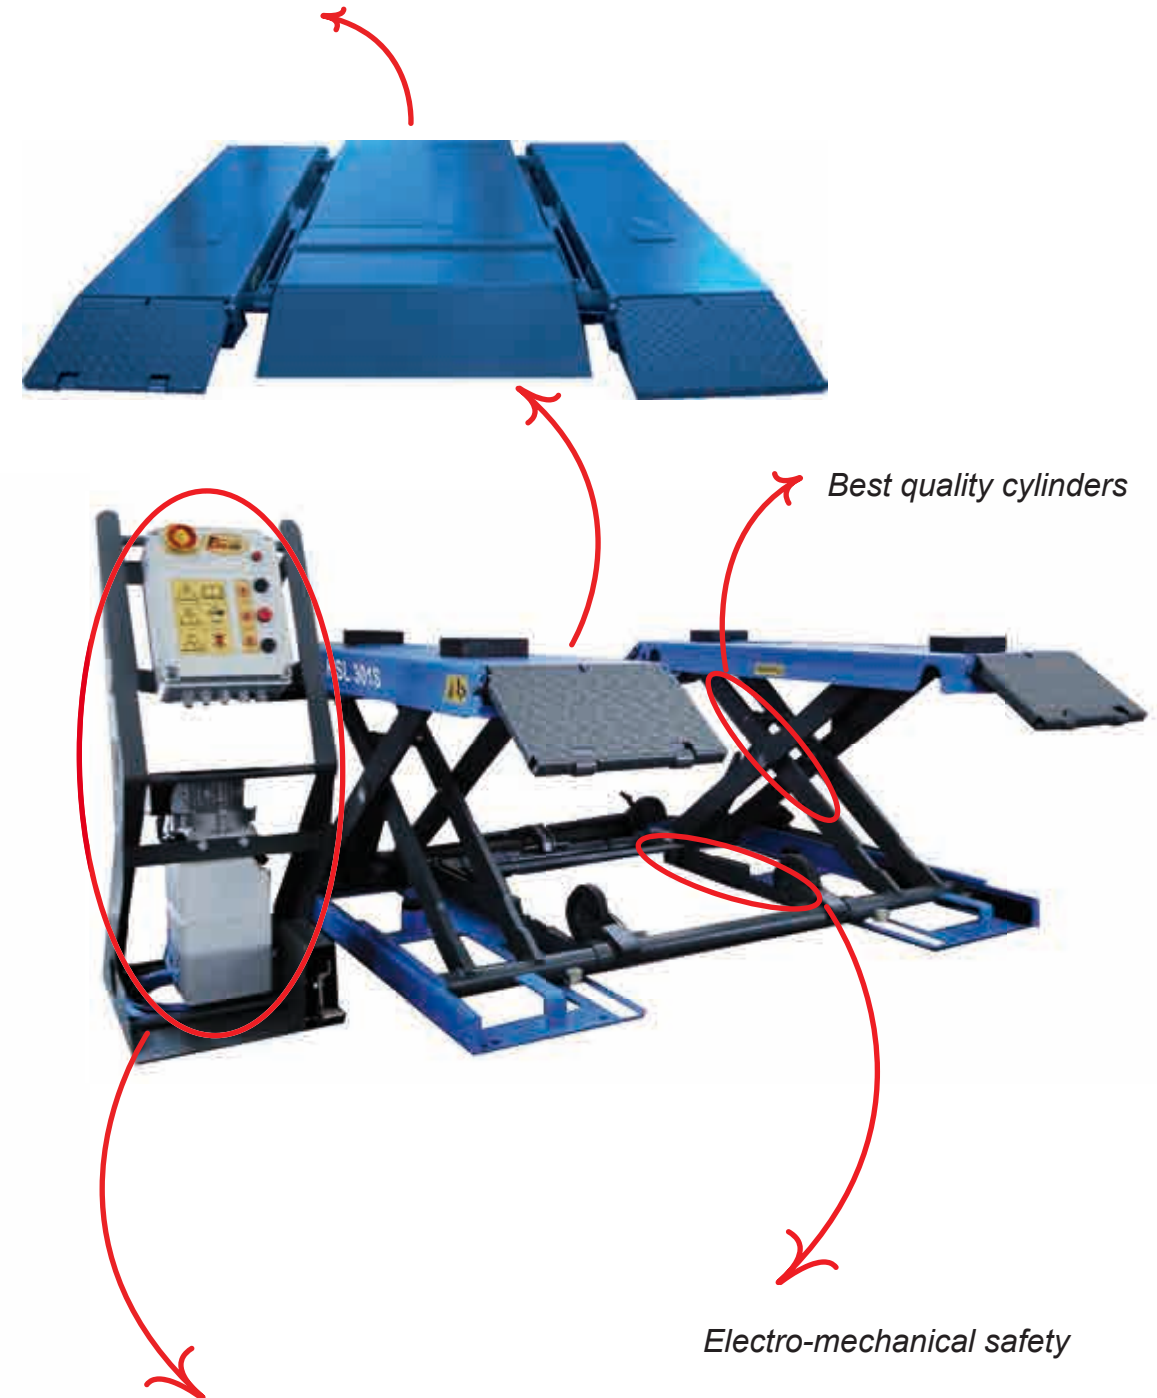

Best quality power unit to reach more life time and power

Electro-mechanical safety

Best quality cylinders

Follow us by your smart device  
[www.boltech.it](http://www.boltech.it)



Follow us by your smart device  
[www.boltech.it](http://www.boltech.it)

