


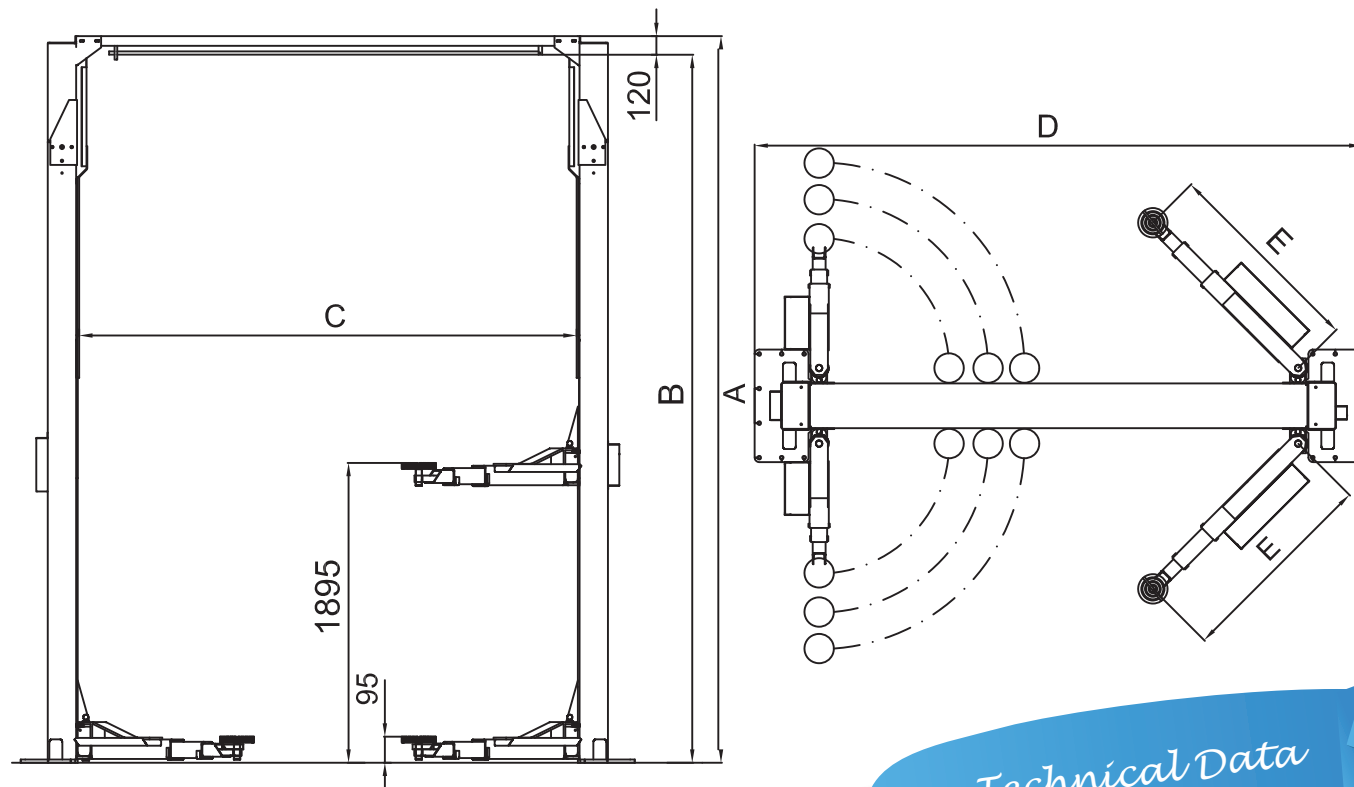

HTL 401 , HTL 402 , HTL 403
HTL 501, HTL 502 , HTL 503

Technical Data

Dimensions (mm)						
	HTL 401	HTL 402	HTL 403	HTL501	HTL502	HTL503
A	3870	4470	5070	3870	4470	5070
B	3750	4350	4950	3750	4350	4950
C	2900	2900	2900	3100	3100	3100
D	3585	3585	3585	3785	3785	3785
E	760-1600	760-1600	760-1600	860 -1700	860 -1700	860 -1700

	HTL 401	HTL 402	HTL 403	HTL 501	HTL 502	HTL 503
Max. capacity (Kg)	4000			5000		
Lifting time (sec)	45					
Lowering time (sec)	42					
Minimum height pad (mm)	95/150/250					
Max height pad (mm)	1895/1950/2050					
Distance between (mm) columns	2900			3100		
Max lift height (A) (mm)	3870	4470	5070	3870	4470	5070
Electric motor	400V-3 Phase - 50 Hz					
Electric motor power (KW)	3					

39100 Bolzano Maso Della Pieve Str.nr. 4/f ITALY
Tel : +39 - 471263755 Direct : +37- 282873136 Fax : +39 - 471267009

Sales@boltech.it

BOLTECH PIONEER OF TECHNOLOGY



Electro-Hydraulic 2-Post Lift 4&5T
HTL 401, HTL 402 , HTL 403, HTL 501 , HTL 502 , HTL 503



SELECT YOUR COLOR

Specification

- Strong structure
- 3- segment structure with 3 different adjustable rubber pads
- Automatic Arm locking device
- Feet protection guard
- Electro-Mechanical locking safety device
- Electro-Hydraulic safety system against accidental misalignment
- Safety limit-switch for anti-crash car
- Overload Safety Device
- Safety-Valve in case of sudden loss of pressure
- Minimal maintenance



Best Quality Power Unit To
Reach More Life Time And Power

Best quality Cylinders



Self-lock/unlock arm system in
lifting mode/reach the floor mode

Follow us by your smart device
www.boltech.it



Follow us by your smart device
www.boltech.it

