


Electro-Hydraulic 2-Post Lift 3.2 ton

HTLB 321 , HTL 321 , HTLB 321-M , HTL 321-M

SELECT YOUR COLOR

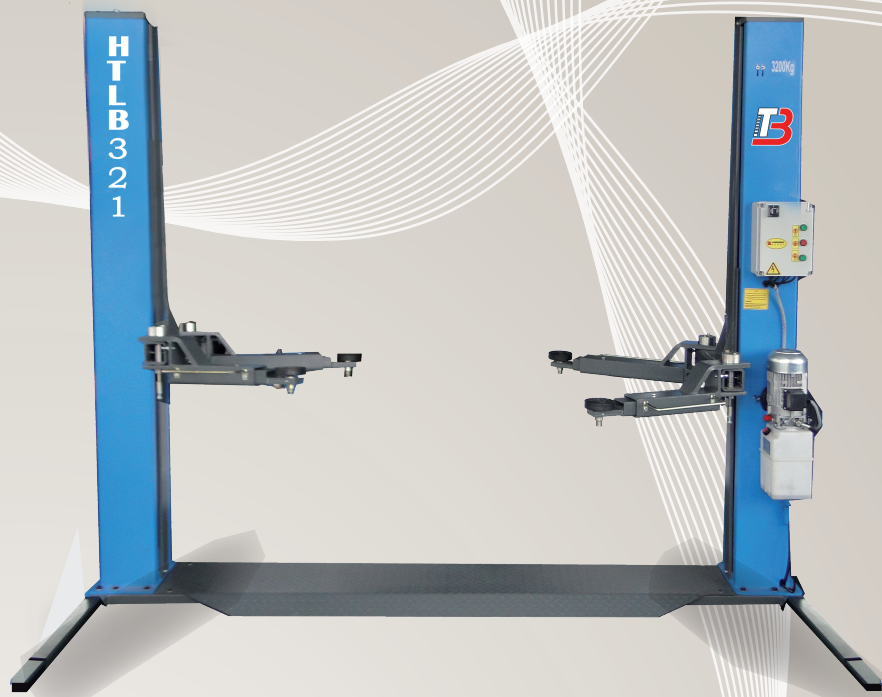

- Automatic Arm locking device
- Feet protection guard
- Interchangeable Screw Pads
- Overload Safety Device
- Descent Control valve
- Safety-Valve in case of sudden loss of pressure
- "Dead Man" Controls 24V (HTL321 , HTLB 321)
- Electrical Controlled Fall Safety (HTL321 , HTLB 321)
- Safety Device in case of rope failure
- Automatic locking device (HTL321 , HTLB 321)
- Manual locking device (HTL 321-M , HTLB 321-M)



Technical Data

Data	HTL 321	HTLB 321
Max. capacity (Kg)	3200	
Lifting time (Sec)	45±2	
Lowering time (Sec)	45±2	
Minimum height pad(mm)	90	
Max lifting height with pad (mm)	1920	
Distance between columns (mm)	2700	
Max lift height (mm)	2600	
Electric motor power	400 V - 3 phase - 50 Hz - 2.2 KW	
Basement	No	Yes
Cover for rope	Yes	No
Number of cylinders	1	

* Single phase and 3 phase is optional



Technical Drawing

